



Wholesale HE4 battery, ICR18650HE4 18650 2500mAh 3.6V he4 battery, he2 35Amps 18650 3.7v lithium ion polymer battery

Our Product Introduction

for more products please visit us on enookbattery.com

Basic Information

- Place of Origin: China
- Certification: UN38.3/CNAS/KC
- Model Number: 18650
- Minimum Order Quantity: 2000
- Payment Terms: T/T, Western Union



Product Specification

- Weight: 50g
- Capacity: 2500mAh
- Size: 18.23*65.07mm
- Type: Flat Top
- Warranty: 1years
- Voltage: 3.7v~ 4.2v
- Charging Temperature: 0°C~50°C
- Discharging Temperature: -20°C~75°C



More Images



Product Description

Wholesale HE4 battery, ICR18650HE4 18650 2500mAh 3.6V he4 battery, he2 35Amps 18650 3.7v lithium ion polymer battery

Product Description:

-Do not over-discharge/overcharge-----

-Recharge empty batteries (resting voltage~3.6V) as soon as possible. Leaving Li-Ion batteries in discharged state will incur irreversible damage (capacity / cycle loss)- Do not short circuit (will release tremendous current)- Keep it away from fire.

Item	Condition / Note	Specification
Capacity	Std. charge / discharge	2500mAh
Nominal Voltage	Average of Std. Discharge	3.60V
Standard Charge	Constant current	1250mA
	Constant voltage	4.20V
	End current(Cut off)	50mA
Fast Charge	Constant current	4000mA
	Constant voltage	4.20V
	End current(Cut off)	100mA
Max. Charge Voltage		4.20V
Max. Charge Current		4000mA
Standard Discharge	Constant current	500mA
	End voltage(Cut off)	2.5V
Fast Discharge	Constant current	10000mA, 20000mA
	End voltage(Cut off)	2.5V
Max. Discharge Current	For continuous discharge	20000mA
Weight	Approx.	Max. 48.0G
Operating Temperature	Charge	0 ~ 50°C
	Discharge	-20~ 75°C
Storage Temperature	1 month	-20 ~ 60°C
	3 months	-20 ~45°C
	1 year	-20 ~ 20°C
Dimension	(D)18.3 + 0.2/-0.3 mm	
	(H) 65.0 ± 0.2 mm	



Advantages:

- 1, High capacity
- 2, Excellent safety performance
- 3, Excellent storage performance and low self-discharge rate
- 4, Safe Performance
- 5, short circuit test passed
- 6, 150C thermal shock test passed
- 7, 1.2m drop test passes
- 8, Cycle life: 500 times
- 9, Charging temperature: 0 to 45 degree Celsius
- 10, Discharging temperature: -20 to 60 degree Celsius
- 11, Storage temperature: -20 to 45 degree Celsius
- 12, PCB/PCM and battery pack available
- 13, Other sizes and capacities can be supplied

Support and Services:

18650 Battery. Technical Support and Service.

We offer comprehensive technical support and service for our 18650 Batteries. Our team of knowledgeable professionals are available to answer your questions and provide you with the technical information you need. From installation and troubleshooting to product performance and maintenance, we are here to help.

Company Introduction

Company Introduction

ShenZhen Enook Technology Co., Ltd company is professional


manufacturer and supplier of lithium energy solutions, E-bike battery pack, which focus on manufacturing and designing of lithium cells and battery packs



Quality first is our principle, Satisfying all our customers is our tenet, win-win business is our aim. Dedicated to strict quality control and thoughtful customer service, our experienced staff members are always available to discuss each detailed requirements from customer and ensure full customer satisfaction.



In addition, we have obtained certificates. MSDS UN38.3 MSDS, ROHS, UL, etc. All our products keep selling well not only around China, but also in USA, Philippines, Germany, England, Australia, Russia, France and other European and Asia countries

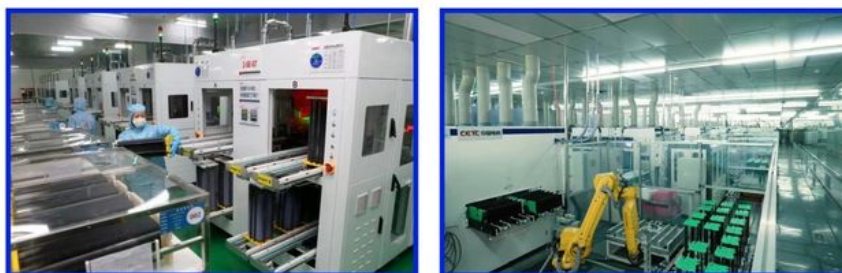

Fast delivery is one of our advantage, selecting a current products from catalogue, or customized products, 3~5 days is the normal time to prepare for the goods, OEM & ODM orders can be acceptable.

Quality is our life, price is our core competence, please don't hesitate to contact us if you have any requirement, we'll provide our best service to you.

Has passed CE certification and ROHS certification, excellent

quality the company has obtained a number of patented technologies.

CERTIFICATES

OUR CERTIFICATES GIVE YOU RELIABLE
SUPPORT FOR YOUR ORDERS



Packing and Shipping:

Packaging and Shipping

18650 batteries must be packaged with extreme care. Each battery must be individually wrapped in an insulated material designed to prevent shorts. The entire package must be placed in a static-resistant bag or box before being shipped. Batteries must never be shipped in bulk or loose without proper packaging.

Batteries should always be shipped via a tracked courier such as FedEx or UPS. The courier should be notified of the battery shipment and the package must be labeled as containing hazardous materials. The package should also be marked with the proper shipping class, such as Class 8, for lithium batteries.

PACKAGING

PACKAGING



Shipping by



Professional suggestion to choose the best shipping delivery (Such as EMS DHL TNT UPS and FEDEX) for your commodities according to your demand.

FAQ:

Q1: When are you available?

A1: 24 hours online every day

Q3: How is the quality of the products?

A3: 1.Always provide the premium authentic products,never fake

2.Only provide A Grade cells

Q4: Do you provide the OEM&ODM service?

A4: Yes,of course.We will try our best to meet our customers' requestment

Q5: What's the lead time?

A5: 1.Sample orders: 1-3 working days

2.Bulk orders: 3-7

working days according to different quantities

3.OEM: 7-12 working days on receipt of sample confirmation

Q6: What's the shipping?

A6: 1.We will choose the most safest and the most economical shipping way for you

2.Always 3-7 days from China to the destination country.Please note that some remote area may 1-3 days delay

Q7: What's the payment?

A7: T/T ,Western Union & Paypal

Q8: What's the warranty of the products?

A8: 1.12 Months warranty

2.Once any problem,please send us HD videos and pictures to show the problem you met,if it's our problem,we will send you new products or full refund except artificial damage



Changsha Enook Technology Co., Ltd



+8617752866093



wendy@enooktech.com



enookbattery.com

ROOM 1717,JIEZUO BUILDING, NO. 828, SECTION 1, FURONG SOUTH ROAD, TIANXIN DISTRICT,
CHANGSHA, HUNAN